

XL-3610

2D Barcode Scanner

Generous and classic design

High performance image technology

Read 3mil high-precision barcode



1D/2D



Mobile payment



Red LED



Plug and play



32-bit



640x480 Pixels



Alipay payment



WeChat payment



Applications



Features

- Unique appearance, stylish shape, modern design
- 0.3 million global shutter camera, fast reading speed 60fps
- Fast reading on all 1D/2D barcode on paper and screen
- Quick decoding 3mil barcode and difficult barcodes
(blurred, wrinkled, low contrast, high density, high accuracy, long barcode)
- Compatible with Windows 7/8/10, iOS, Android, Linux system
- Suitable for retail stores, supermarkets, restaurant, pharmacy

SUNLUX IOT TECHNOLOGY (GUANGDONG) INC.



Office Add: Room 1201, Building A, No.76 Xinye Road, Huangpu District, Guangzhou, 511356, China
Tel: +86-20-32053765 Fax: +86-20-82115390 Website: www.xl-scan.com E-mail: overseas01@xl-scan.cn



XL-3610

Technical Parameters

Performance Parameter	
Light Source	White LED (Lighting) RED aiming light
CPU	32bit ARM
Image Sensor	CMOS
Image Size	640x480 Pixels
Scanning Speed	60 FBS
Print Contrast	≥15%
Minimum Resolution	≥3mil
Scan Mode	Manual & Automatic
Scanning Angle	(Skew/Pitch) +/- 65°
Depth of Field	60-360mm (13mil PCS90%)
Decoding Capability	1D: Codabar, Code11, Code39, Code32, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Code93, Code128, GS1-128, UPC-A, UPC-E, EAN 8, EAN 13, GS1 DataBar, RSS14, GS1 DataBar Limited, GS1 DataBar Expanded, etc. 2D: PDF417, Micro PDF417, QR Code, Micro QR, Data Matrix, Aztec Code
Other Parameters	
Size	LxWxH: 163x68x80 (mm)
Weight	185g
Case Material	ABS+TPU
Input Voltage	DC 3.6V~5.5V
Working Current	142mA
Stand-by Current	42mA
Indicator	LED Indicator and Buzzer
Interface	USB-HID, USB-VCP, RS232
Cable	Straight 1.5m
Temperature (Operating)	-10°C ~ 50°C
Humidity	5% to 95% (Non-condensing)
Temperature (Storage)	-20°C ~ 60°C
Resistance To Ambient Light	0~5,000Lux (Fluorescence), 0~100,000Lux (Sunlight)

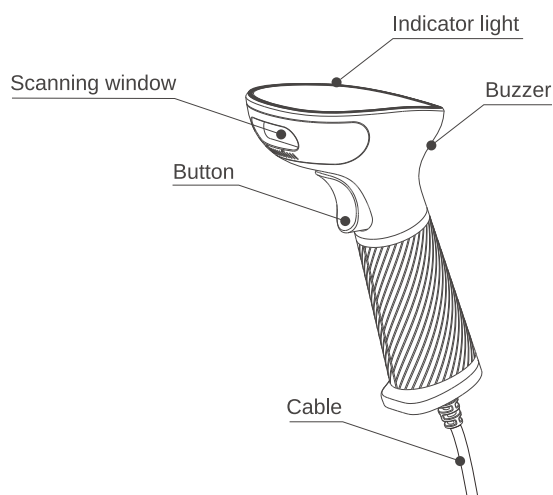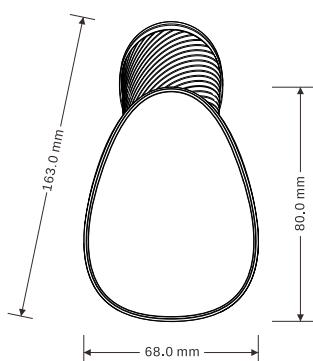

*XL-3610-17/07/26B-V.1.0.0