

XL-2600A

2D Desktop Barcode Scanner

Generous and classic design

High performance image technology

Wide scanning area and sensitivity



1D/2D



Mobile payment



Auto



Plug and play




32-bit



640x480 Pixels



Applications

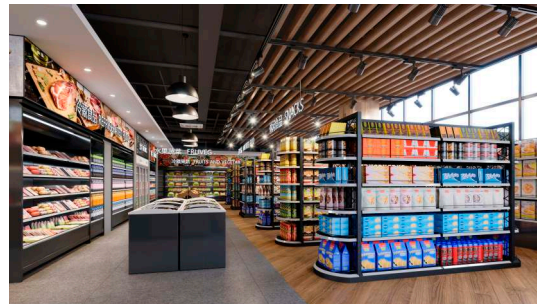

Features

- Soft indicator light gives a better sense of experience
- Ultra-wide scanning angle and quick scanning speed
- 100% self-independent technology, support online upgrade
- Compatible with Linux, Android, Windows XP/7/8/10/MAC OS
- Suitable for retail stores, supermarkets, healthcare system, etc
- Adjustable volume to meet different environmental requirements

SUNLUX IOT TECHNOLOGY (GUANGDONG) INC.



Office Add: Room 1201, Building A, No.76 Xinye Road, Huangpu District, Guangzhou, 511356, China
Tel: +86-20-32053765 Fax: +86-20-82115390 Website: www.xl-scan.com E-mail: overseas01@xl-scan.cn



XL-2600A

Technical Parameters

Performance Parameter	
Light Source	Red LED (Lighting)
CPU	32-bit Processor
Scan Mode	Automatic and Continuous
Image Size	640x480 Pixels
Scanning Speed	120 FPS
Mobile Tolerance	1.5m/s
Mnimum Resolution	≥4mil
Scanning Direction	Omnidirectional
Scanning Angle	Deflection 360° inclination ±65° rotation ±60°
Depth of Field	5-150mm (13mil Code39)
Decoding Capability	1D: Codabar, Code39, Code32, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Code93, Code128, GS1-128, UPC-A, UPC-E, EAN 8, EAN 13, GS1 DataBar (RSS14), GS1 DataBar Limited, GS1 DataBar Expanded, etc 2D: PDF417, Micro PDF417, QR Code, Micro QR, Data Matrix, Aztec Code, Maxicode, Hanxin code
Other Parameters	
Size	L×W×H: 88×53×153 (mm)
Weight	296.2g (Including cable)
Case Material	ABS+PC
Input Voltage	DC 5V
Working Current	< 175mA
Stand-by Current	< 145mA
Indicator	Tone and Volume adjustable
Interface	USB-HID, RS-232, USB-VCP
Cable	Straight 2m
Temperature (Operating)	-10°C~50°C
Humidity	5% to 95% (Non-condensing)
Temperature (Storage)	-20°C~60°C
Resistance To Ambient Light	0~5,000Lux (Fluorescent), 0~100,000Lux (Sunlight)

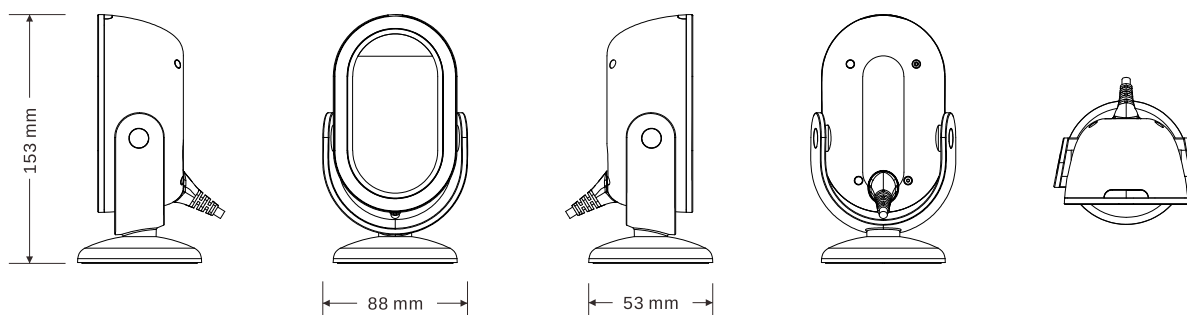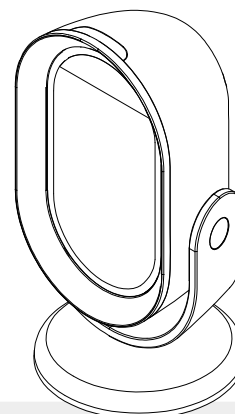

*XL-2600A-23/07/26B-V.1.0.0