SUNLUX

# XL-3621S

## 2D Barcode Scanner with Stand

Avant-garde Design Sense

Super Decoding Ability

Handsfree with Stand



1D/2D | Mobile payment | 32-bit | Red LED | Plug and play | 640x480 Pixels | IP 54

## Features

- Fast reading on all 1D/2D barcode on paper and screen
- 0.3 million high performance imaging technology, fast reading speed 60 fps
- Light industrial design, unique appearance, fashionable shape
- Compatible with Windows 7/8/10, iOS, Android, Linux system
- Plug and play, no need to install drivers, support firmware upgrade
- Suitable for retail stores, supermarkets, restaurant, pharmacy, assembly line






**SUNLUX IOT TECHNOLOGY (GUANGDONG) INC.**

Office Add: Room 1201, Building A, No.76 Xinye Road, Huangpu District, Guangzhou, 511356, China

Tel: +86-20-32053765 Fax: +86-20-82115390 Website: www.xl-scan.com E-mail: overseas01@xl-scan.cn

# XL-3621S
## Technical Parameters

| Performance Parameter | |
|---|---|
| Image Sensor | CMOS |
| Light Source | White LED (Lighting) Red LED (Aiming) |
| CPU | 32bit ARM |
| IP Rating | IP 54 |
| Resolution | 640x480 Pixels |
| Scanning Speed | 60 FPS |
| Depth of Field | 60~360mm (13mil EAN13) |
| Minimum Resolution | ≥3mil |
| Interface | USB-HID, USB-VCP, RS232 |
| Scan Mode | Manual & Automatic |
| Materials | ABS+TPU |
| Size | LxWxH: 112.5x81.5x204 (mm) |
| Weight | 185g |
| Input Voltage | DC 3.6V ~ 5.5V |
| Working Current | 142mA |
| Stand-by Current | 42mA |
| Temperature(Operating) | -10°C ~ 50°C |
| Temperature(Storage) | -20°C ~ 60°C |
| Indicate | LED Indicator and Buzzer |
| Cable Standard | 2 Meters |
| Humidity | 5% ~ 95% (Non-condensing) |
| Light Source | 0 ~ 5,000Lux (Fluorescent light), 0 ~ 100,000Lux (Sunlight) |
| Decoding Capability | 1D: Codabar, Code11, Code39, Code32, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Code93,Code128, GS1-128, UPC-A, UPC-E, EAN 8, EAN 13, GS1 DataBar, RSS14, GS1 DataBar Limited, GS1 DataBar Expanded, etc.<br>2D: PDF417, Micro PDF417, QR Code, Micro QR, Data Matrix, Aztec Code |

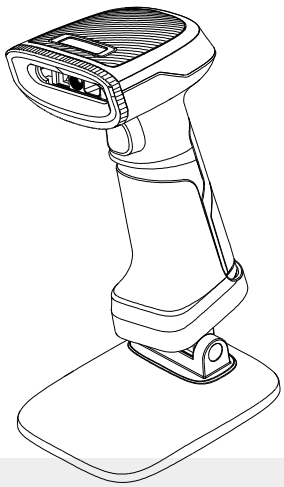

*XL-3621S-11/25B-V1.0.0

