



XL-9621C

2D Wireless Barcode Scanner

New Design Concept
Strong Compatibility
Independent Core Technology



1D/2D



Mobile payment



32-bit ARM



Red LED



640x480 Pixels

Features

- 2600mAh battery support continuous scanning of 27 hours
- 2.4G+BT modes, easy to connect with your PC and mobile devices
- Good at reading high density and difficult barcodes
- Easy online upgrade can be finished in several seconds
- Ideal solution for warehouse and logistic environment using



SUNLUX IOT TECHNOLOGY (GUANGDONG) INC.

Office Add: Room 1201, Building A, No.76 Xinye Road, Huangpu District, Guangzhou, 511356, China
Tel: +86-20-32053765 Fax: +86-20-82115390 Website: www.xl-scan.com E-mail: overseas01@xl-scan.cn




XL-9621C

Technical Parameters

Performance Parameters

CPU	32bit ARM
Light Source	White LED (Lighting) Red LED (Aiming)
Scan Mode	Manual & Automatic
Image Sensor	CMOS
Resolution	640x480 Pixels
Scanning Speed	60 FPS
System Supported	Android/Windows/Linux/IOS
Minimum Resolution	≥3mil
Scanning Angle	Rotate 360°, inclination 65°,elevation 60°
Depth of Field	50~390mm (13mil Code39)
Decoding Capability	1D: Codabar, Code11, Code39, Code32, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Code93, Code128, GS1-128, UPC-A, UPC-E, EAN 8, EAN 13, GS1 DataBar (RSS14), GS1 DataBar Limited, GS1 DataBar Expanded, etc 2D: PDF417, Micro PDF417, QR Code, Micro QR, Data Matrix, Aztec Code

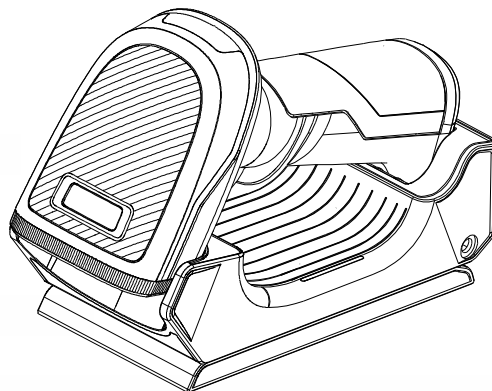

Physical Parameters

Size	Scanner: 147.7x90.6x62.8 (mm) Cradle:164.7x71.1x52.6 (mm)
Weight	Scanner: 188.4g Cradle: 318.3g
Material	ABS+PC
Input Voltage	DC 5V
Working Current	250mA
Stand-by Current	<90mA
Indicator	LED indicator light, buzzer
Interface	USB,USB-VCP
Charging Way	Charging on base; Charging with Type-C interface
Standby Time	6 Months (Dormant state)
Charging Time	4.5H
Continuous Battery Life	27H
Battery	Replaceable & Rechargeable lithium battery, 2600mAh
Receiver Interface	USB

Other Parameters

Communication Methods	2.4G wireless communication, Bluetooth wireless communication
Communication Distance	2.4G mode: 150m (Open space) Bluetooth mode: 10m (Open space)
Humidity (Operating)	Relative humidity 5%~95% (No condensation)
Temperature	Operating Temperature: -10°C~50°C Storage Temperature: -20°C~60°C
Light Source	0~5,000Lux (Fluorescent), 0~100,000Lux (Sunlight)

*XL-9621C-22/07/26B-V1.0.0

